


Tornillo Socket con Hombro (Cabeza Allen) Stripper Bolt

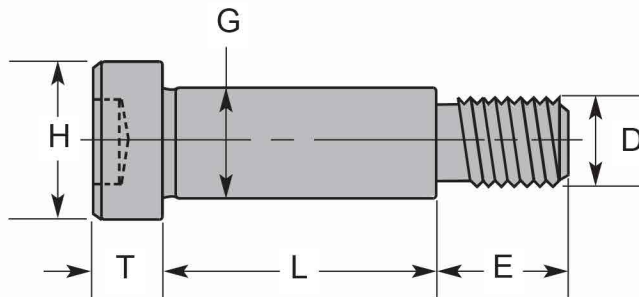

Dimensiones Generales

Diámetro del Hombro (G)	1/4	5/16	3/8	1/2	5/8	3/4
Roscado (D)	#10-24	1/4-20	5/16-18	3/8-16	1/2-13	5/8-11
Longitud del roscado (E)	3/8	7/16	1/2	5/8	3/4	7/8
Diámetro de Cabeza (H)	3/8	7/16	9/16	3/4	7/8	1
Altura de Cabeza (T)	3/16	7/32	1/4	5/16	3/8	1/2
Tamaño de Llave Hex	1/8	5/32	3/16	1/4	5/16	3/8

- Material: Acero Aleado de Alta Calidad
- Tratamiento de Calor: 36 - 43 Rc
- Fuerza Tensil: 160,000 psi
- Clase de Roscado: 3A

L LONGITUD DE HOMBRO	G DIÁMETRO DEL HOMBRO					
	1/4	5/16	3/8	1/2	5/8	3/4
1	SB17-1000	SB21-1000	SB25-1000	SB33-1000		
1-1/4	SB17-1250	SB21-1250	SB25-1250	SB33-1250	SB37-1250	
1-1/2	SB17-1500	SB21-1500	SB25-1500	SB33-1500	SB37-1500	SB41-1500
1-3/4		SB21-1750	SB25-1750	SB33-1750	SB37-1750	SB41-1750
2		SB21-2000	SB25-2000	SB33-2000	SB37-2000	SB41-2000
2-1/4			SB25-2250	SB33-2250	SB37-2250	SB41-2250
2-1/2			SB25-2500	SB33-2500	SB37-2500	SB41-2500
2-3/4			SB25-2750	SB33-2750	SB37-2750	SB41-2750
3			SB25-3000	SB33-3000	SB37-3000	SB41-3000
3-1/4			SB25-3250	SB33-3250	SB37-3250	SB41-3250
3-1/2			SB25-3500	SB33-3500	SB37-3500	SB41-3500
3-3/4			SB25-3750	SB33-3750	SB37-3750	SB41-3750
4			SB25-4000	SB33-4000	SB37-4000	SB41-4000
4-1/4				SB33-4250	SB37-4250	SB41-4250
4-1/2				SB33-4500	SB37-4500	SB41-4500
4-3/4				SB33-4750	SB37-4750	SB41-4750
5				SB33-5000	SB37-5000	SB41-5000
5-1/2				SB33-5500	SB37-5500	SB41-5500
6				SB33-6000	SB37-6000	SB41-6000
7						SB41-7000