

Hex Key Cascade Assemblies


- Easy hex key assemblies
- Compact design allows for minimum clearance installation
- 12" Stainless Steel Tube Included
- 2" Stainless steel pipe nipple included

Hex Key Cascade Assemblies can be installed and removed in very tight spaces with a hex key wrench. The high flow tubes ensure flow is maintained in these very tight spaces. Assemblies include brass head, 12" high flow stainless tube and 2" pipe nipples.



SPECIFICATIONS

Material Type	Brass Head, Stainless Steel Pipe Nipple, Stainless Steel Tube
Mold Nipple Length	2
Tube Length	12
Unit of Measure	Inch

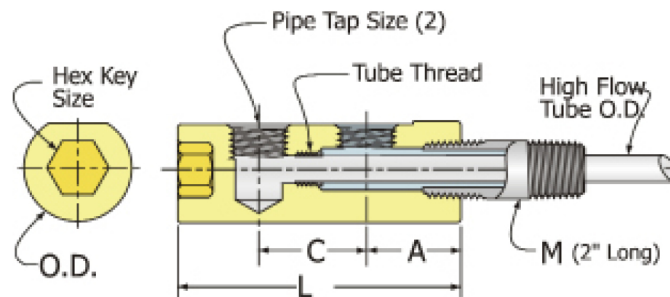

CATALOG NO.	PIPE TAP SIZE (NPT)	TUBE O.D.	TUBE I.D.	L LENGTH	C OUTLET HOLE SPREAD	A OUTLET HOLE LOCATION	HEX KEY SIZE	NOMINAL CLEARANCE DRILL	O.D.
Mold Nipple: 1/16									
E16N	1/16	0.125	0.109	1.625	9/16	1/2	5/16	5/8	.610
Mold Nipple: 1/8									
E16N-2	1/16	0.125	0.109	1.687	9/16	9/16	3/8	3/4	.735
E186N	1/8	0.187	0.167	1.875	11/16	9/16	3/8	7/8	.860
E181N	1/8	0.187	0.167	2.187	1	9/16	3/8	7/8	.860
Mold Nipple: 1/4									
E141N	1/8	0.250	0.230	2.500	1	13/16	1/2	1	.985
E146N	1/8	0.250	0.230	2.187	11/16	13/16	1/2	1	.985
E141N-4	1/4	0.250	0.230	2.625	1	7/8	1/2	1	.985
E146N-4	1/4	0.250	0.230	2.312	11/16	7/8	1/2	1	.985
Mold Nipple: 3/8									
E381N-4	1/4	0.312	0.288	2.625	1	7/8	1/2	1	.985
Mold Nipple: 1/2									
E121N-4	1/4	0.365	0.273	2.812	1	1	1/2	1-1/4	1.235