


Metric DIN Nitrided Ejector Blades

- One piece construction to improve strength
- Core hardness 50 - 52 Rc
- Nitrided 65 - 74 Rc
- Heads annealed for easier machining
- Corner radius on blade cross-section can be special ordered
- Custom sizes available upon request



SPECIFICATIONS

W Blade Width Tolerance	+0.000 / -0.015
D Blade Thickness Tolerance	+0.0 / -0.015
A Pin Diameter Tolerance	+0.00 / -0.10
H Head Diameter Tolerance	+0.00 / -0.20
T Head Thickness Tolerance	+0.00 / -0.05
BL Blade Length Tolerance	+2.00 / -0.00
Shoulder Length Tolerance	-1.0 / -0.2
L Overall Length Tolerance	+2.00 / -0.00
Etched for Identification	Yes

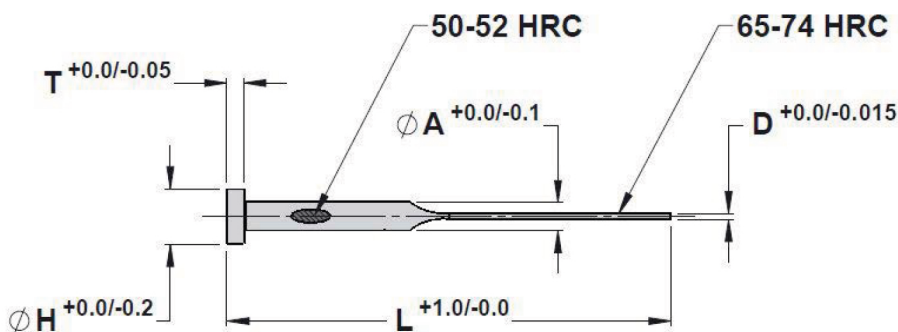

Standard: Metric DIN
 Material: H-13 / 1.2344 Steel
 Surface Treatment: Nitrided 65 - 74 HRC

- Stocked items
- 2-3 Week Delivery

CATALOG NO.	W BLADE WIDTH	D BLADE THICK.	A PIN DIA.	H HEAD DIA.	T HEAD THICK.	L OVERALL LENGTH								
						063	080	100	125	160	200	250	315	400
						SHOULDER LENGTH								
						32	40	50	63	80	100	125	155	200
MB03510-	3.5	1	4	8	3					•				
MB03512-	3.5	1.2	4	8	3			•						
MB03808-	3.8	0.8	4.2	8	3									
MB03810-	3.8	1	4.2	8	3	•				•				
MB03812-	3.8	1.2	4.2	8	3					•				
MB04510-	4.5	1	5	10	3				•	•				
MB04512-	4.5	1.2	5	10	3				•					

Add length to end of catalog number (i.e. MB03510-063)

Continued on next page


Metric DIN Nitrided Ejector Blades

- One piece construction to improve strength
- Core hardness 50 - 52 Rc
- Nitrided 65 - 74 Rc
- Heads annealed for easier machining
- Corner radius on blade cross-section can be special ordered
- Custom sizes available upon request



SPECIFICATIONS

W Blade Width Tolerance	+0.000 / -0.015
D Blade Thickness Tolerance	+0.0 / -0.015
A Pin Diameter Tolerance	+0.00 / -0.10
H Head Diameter Tolerance	+0.00 / -0.20
T Head Thickness Tolerance	+0.00 / -0.05
BL Blade Length Tolerance	+2.00 / -0.00
Shoulder Length Tolerance	-1.0 / -0.2
L Overall Length Tolerance	+2.00 / -0.00
Etched for Identification	Yes

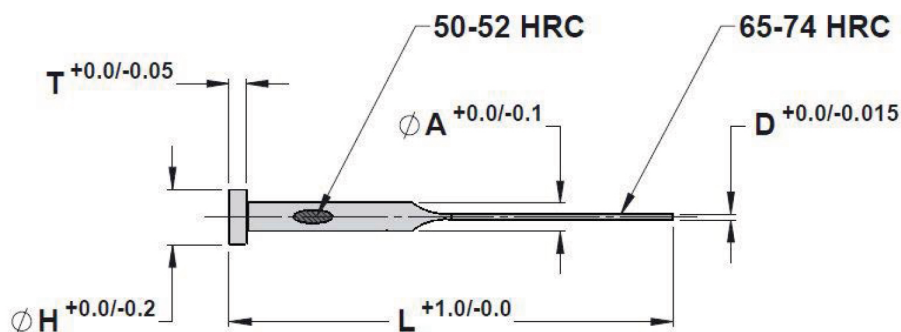

Standard: Metric DIN
Material: H-13 / 1.2344 Steel
Surface Treatment: Nitrided 65 - 74 HRC

- Stocked items
- 2-3 Week Delivery

CATALOG NO.	W BLADE WIDTH	D BLADE THICK.	A PIN DIA.	H HEAD DIA.	T HEAD THICK.	L OVERALL LENGTH								
						063	080	100	125	160	200	250	315	400
						SHOULDER LENGTH								
						32	40	50	63	80	100	125	155	200
MB04515-	4.5	1.5	5	10	3			•	•	•	•			
MB05510-	5.5	1	6	12	5					•				
MB05512-	5.5	1.2	6	12	5				•	•				
MB05515-	5.5	1.5	6	12	5			•			•			
MB05520-	5.5	2	6	12	5									
MB07512-	7.5	1.2	8	14	5									
MB07515-	7.5	1.5	8	14	5				•		•			
MB07520-	7.5	2	8	14	5					•			•	
MB09515-	9.5	1.5	10	16	5									

Add length to end of catalog number (i.e. MB04515-080)


Continued on next page

Metric DIN Nitrided Ejector Blades



- One piece construction to improve strength
- Core hardness 50 - 52 Rc
- Nitrided 65 - 74 Rc
- Heads annealed for easier machining
- Corner radius on blade cross-section can be special ordered
- Custom sizes available upon request

SPECIFICATIONS	
W Blade Width Tolerance	+0.000 / -0.015
D Blade Thickness Tolerance	+0.0 / -0.015
A Pin Diameter Tolerance	+0.00 / -0.10
H Head Diameter Tolerance	+0.00 / -0.20
T Head Thickness Tolerance	+0.00 / -0.05
BL Blade Length Tolerance	+2.00 / -0.00
Shoulder Length Tolerance	-1.0 / -0.2
L Overall Length Tolerance	+2.00 / -0.00
Etched for Identification	Yes

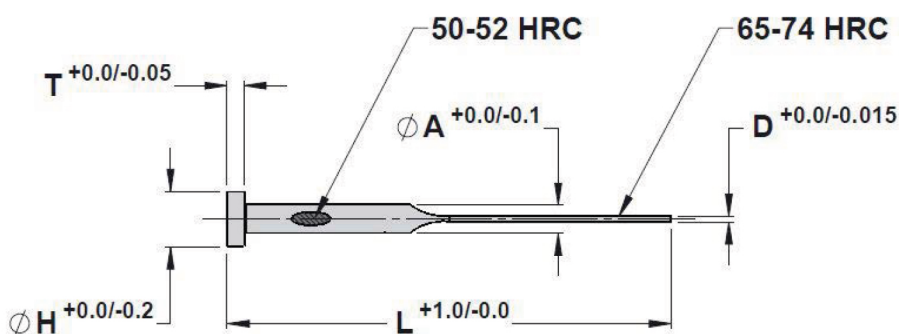

Standard: Metric DIN
 Material: H-13 / 1.2344 Steel
 Surface Treatment: Nitrided 65 - 74 HRC

- Stocked items
- 2-3 Week Delivery

CATALOG NO.	W BLADE WIDTH	D BLADE THICK.	A PIN DIA.	H HEAD DIA.	T HEAD THICK.	L OVERALL LENGTH								
						063	080	100	125	160	200	250	315	400
						SHOULDER LENGTH								
						32	40	50	63	80	100	125	155	200
MB09520-	9.5	2	10	16	5						●			
MB11520-	11.5	2	12	18	7									
MB11525-	11.5	2.5	12	18	7									
MB15520-	15.5	2	16	22	7									
MB15525-	15.5	2.5	16	22	7									

Add length to end of catalog number (i.e. MB09520-160)