


Nipple Type Cascade Assemblies

- Most popular style of cascade
- Efficient design improves cooling rates
- 12" Brass Tube Included
- 2" Stainless steel pipe nipple included
- Brass Pipe plug included



Nipple Type Cascade Assemblies are an economical solution for many cooling applications. The solid brass heads are precision machined for accurate assembly. Each assembly includes a brass head, 12" brass tube, 2" pipe nipples and brass pipe plug.

SPECIFICATIONS	
Material Type	Brass Head, Brass Tube, Brass Pipe Plug, Steel Pipe Nipple
Mold Nipple Length	2
Tube Length	12
Unit of Measure	Inch

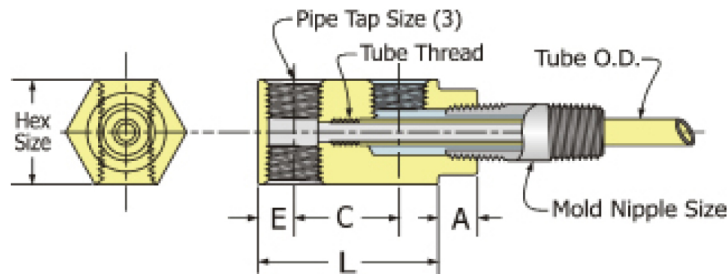

CATALOG NO.	PIPE TAP SIZE (NPT)	TUBE O.D.	TUBE I.D.	HEX KEY SIZE	E INLET HOLE LOCATION	C OUTLET HOLE SPREAD	A PILOT DIAMETER	L HEAD LENGTH
Mold Nipple: 1/8								
C130	1/8	0.187	0.123	7/8	21/64	11/16	9/32	1-11/32
C130A	1/8	0.187	0.123	7/8	21/64	1	9/32	1-21/32
Mold Nipple: 1/4								
C131	1/8	0.250	0.170	1	21/64	11/16	7/32	1-11/32
C131A	1/4	0.250	0.170	1	21/64	11/16	7/32	1-11/32
C132	1/8	0.250	0.170	1	21/64	1	7/16	1-21/32
C132A	1/4	0.250	0.170	1	21/64	1	7/16	1-21/32
Mold Nipple: 3/8								
C136A	1/4	0.312	0.210	1	11/32	1	13/32	1-11/16
Mold Nipple: 1/2								
C138A	1/4	0.437	0.307	1-1/4	12/32	1	9/16	1-13/16
Mold Nipple: 3/4								
C140A	3/8	0.625	0.495	1-1/2	1/2	1/14	3/4	2-1/4